


## Best/Flex 300

### Gravity Applications

Built tough to handle applications running three shifts per day. Ideally suited for truck loading and unloading, distribution centers, shipping and receiving. The optional Impact Support Section is recommended for high impact receiving applications.

Move in and out of trucks with POWERTRAX for faster, safer, easier loading and unloading. See page 5.

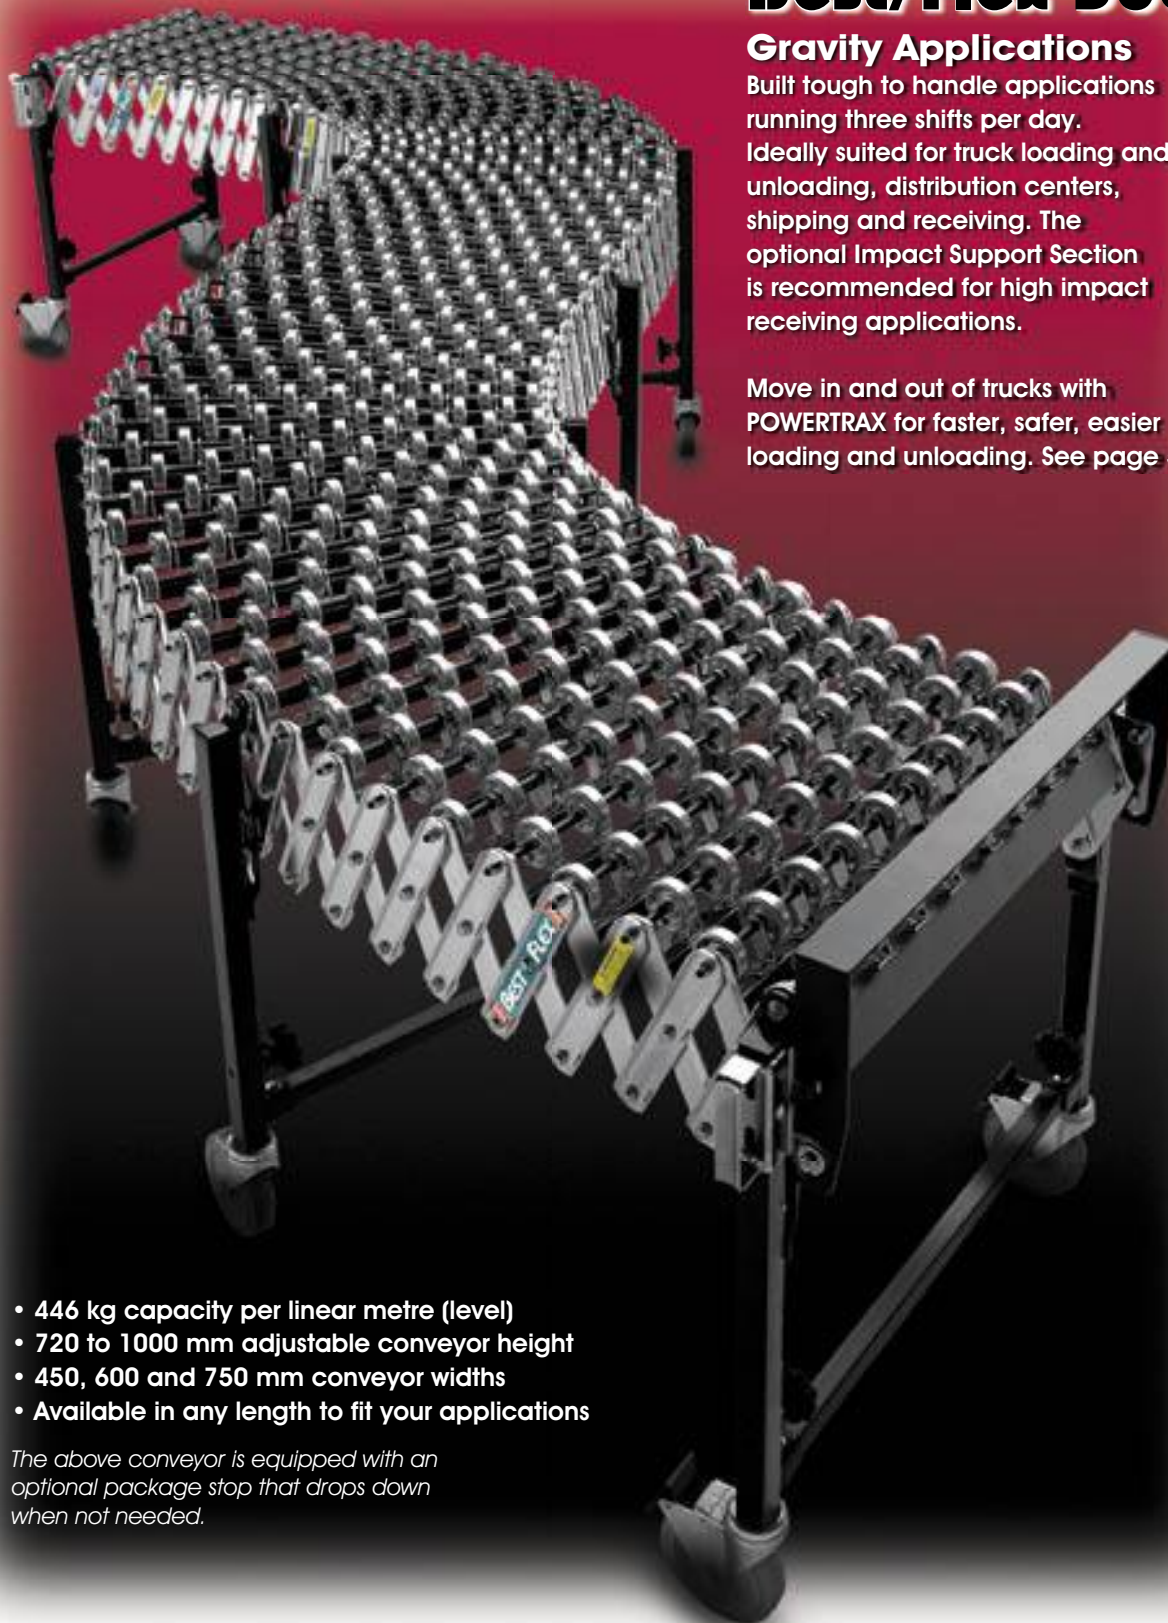

- 446 kg capacity per linear metre (level)
- 720 to 1000 mm adjustable conveyor height
- 450, 600 and 750 mm conveyor widths
- Available in any length to fit your applications

*The above conveyor is equipped with an optional package stop that drops down when not needed.*